
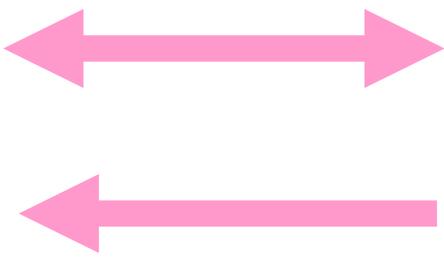


Registering a Device in CSRC (Using E-mail) (1/6)

About E-mail communication

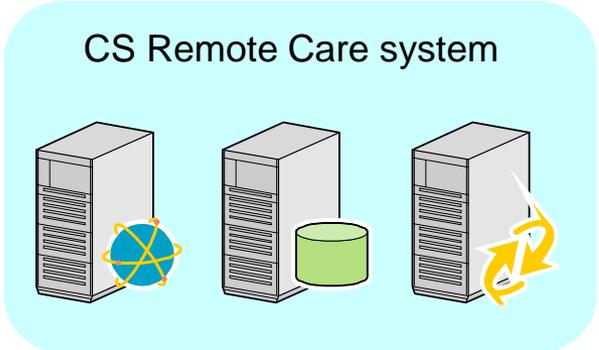

● Bidirectional communication

- Registering from the Web application
- Registering using a transmission sent from a device



● Unidirectional communication

- Registering using a transmission sent from a device


Registering a Device in CSRC (Using E-mail) (2/6)

Register the CSRC setting from Service Mode.

* In PSWC mode, start the http:// IP address /csrc_index.html.

1.

Service Mode > [CS Remote Care] > [Maintenance/ Default Setting]> [ID Code]

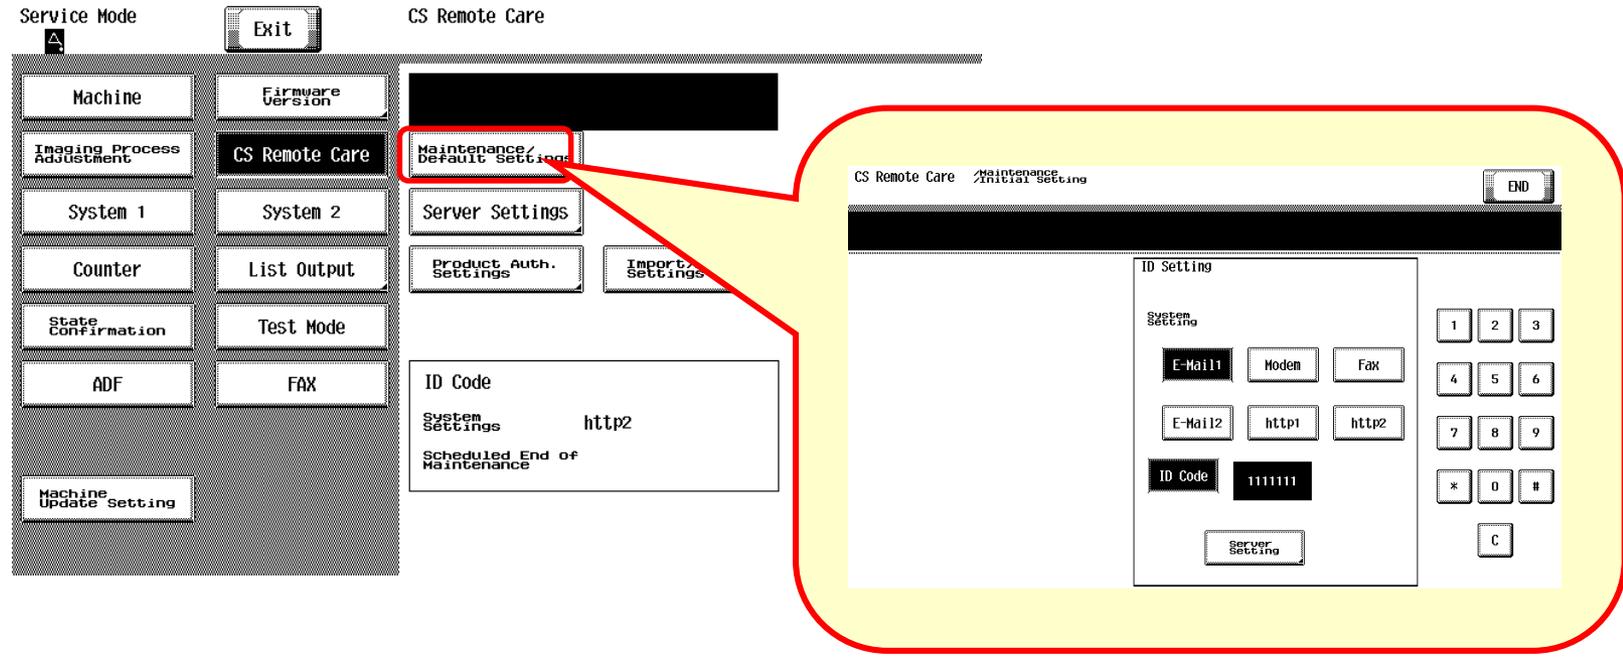

[E-Mail1]>[IDコード]>111111(Example)>[ID Code] > [Detail Settings]

- E-Mail1: Bidirectional communication
- E-Mail2: Unidirectional communication

Registering a Device in CSRC (Using E-mail) (3/6)

2. Service Mode > [CS Remote Care] > [Maintenance Default Setting]> [Detail Settings]

CS Remote Care /Detail Settings END

Completed.

Center Setting


Center ID: KRDS1

E-Mail Address: csrc@cs0.test.local

Encryption: Yes No

Center ID: 「KRDS1」 for communication ID
* Set the same ID as System setting of the KM Core Ver2.

KM Core Ver2

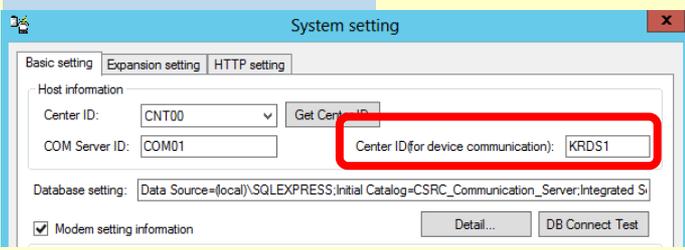

The screenshot shows the 'System setting' window for 'KM Core Ver2'. Under the 'Host information' tab, the 'Center ID for device communication' field is highlighted with a red box and contains the value 'KRDS1'. Other fields include 'Center ID' (CNT00) and 'COM Server ID' (COM01).

E-Mail address:
Enter the e-mail address of the CSRC system.



Registering a Device in CSRC (Using E-mail) (4/6)

3.

Service Mode > [CS Remote Care] > [Maintenance Default Setting]> [Server Settings]

Enter the server setting values.

Enter the E-mail address of the MFP Device.

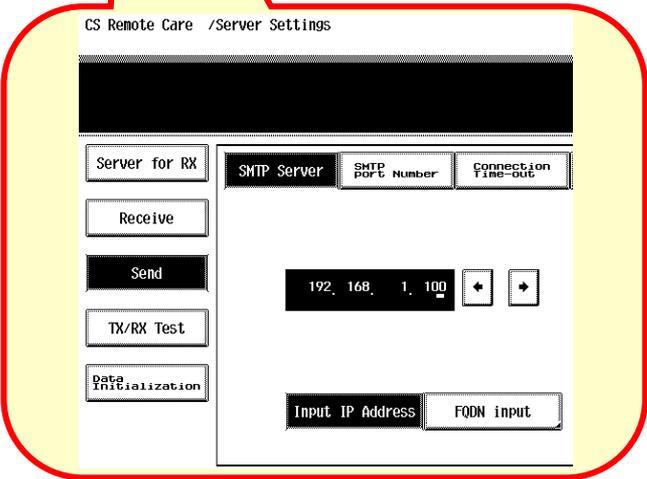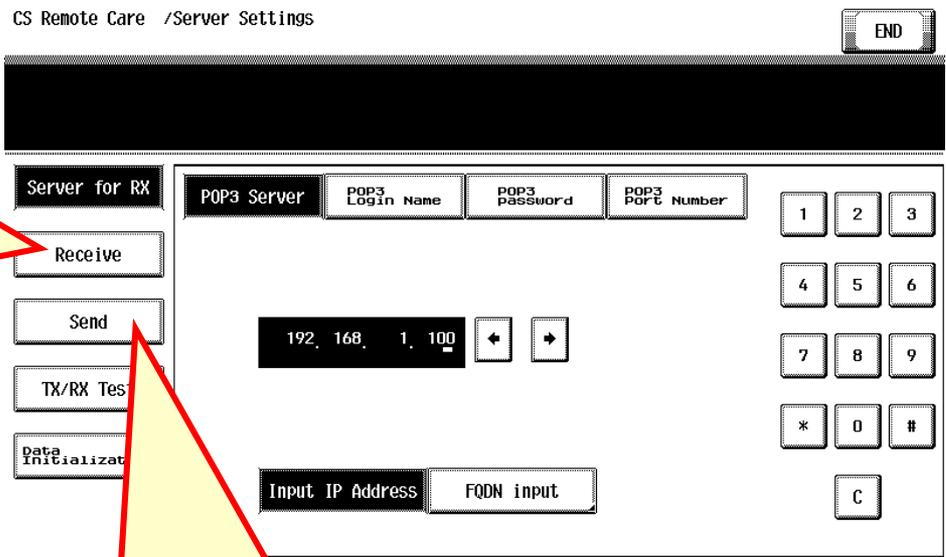

Registering a Device in CSRC (Using E-mail) (5/6)

4. Service Mode > [CS Remote Care] > [Maintenance / Default Setting] > [Detail Setting]

CS Remote Care /Detail Settings

END

Completed.

Basic Setting	Center Setting	Initial Transmission
Date & Time Setting	Center ID KRDS1	Device ID A2X0017000097
RAM Clear	E-Mail Address	
Communication Log Print	csrc@cs0.test.local	
Software Switch Setting	Encryption Yes No	
Response Time Out		

1 2 3
4 5 6
7 8 9
* 0 #
C

Click [Initial Transmission].

Registering a Device in CSRC (Using E-mail) (6/6)

5.

Confirmation of the device registration

Registration completed!

CS Remote Care Dashboard Maintenance Entity Report Other Apps Link Administrator

Counter Info

CenterID	DeviceID	Device Name	Product Name	Protocol	Initial Conn. Date	Center Name	Serial Number	ComSt
CNT00	A2X0017000097	A2X0017000097	C754e_4th	E-Mail 1: Interactive	2016/10/11 18:11:00	CNT001	A2X0017000097	COM0
CNT00	A2X1001000019	A2X1001000019	C654	HTTP 1: Interactive	2016/10/11 13:26:00	CNT001	A2X1001000019	COM0
CNT00	A5AY011000472	A5AY011000472	C554e_5th	HTTP 1: Interactive	2016/09/08 16:14:00	CNT001	A5AY011000472	COM0
CNT00	A5AY011000473	C554e_modem	C554e_5th	Telephony	---	CNT001	A5AY011000473	COM0

Page 1 of 1 (4 items) Page size: 10

Menu Past Data1 Past Data2 History

Device Command Entity

C554e_modem (C554e_5th)

Under Trouble and Warning

Code	Description
------	-------------

Product Name

E-Mail1
(Bidirectional Communication)